


14½" x 1

PART NUMBER	TYPE	RUBBER	INLET
PNP 30408 02 00	Bellow	Standard	N/A
PNP 30414 01 19	Assembly	Standard	1/2" BSP
A 3 1484 0B 25	Bellow	Butyl	N/A
	Assembly	Butyl	1/2" BSP

Conditions of Use

Maximum Working Pressure	8bar
Burst Pressure	26bar
Maximum Angle between Top & Bottom Plates	15°
Maximum Axial Offset	10mm

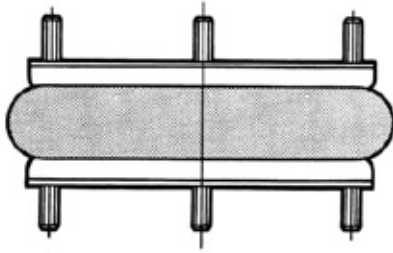

Precautions to Observe

Do not exceed stated stroke.

Do not inflate assembly when it is unrestricted.

Do not inflate beyond pressures stated without prior consultation with Dunlop.

Respect maximum and minimum heights.

The bellows must be securely fixed.

Do not use without air pressure.

Operating Temperature

Minimum Temperature -30°C (-40°C static)

Maximum Temperature 70°C (90°C static)

Materials

- Bellows : various rubbers
- Metal parts : mild steel, protected by zinc passivate and yellow chromate

Note

This bellow assembly can be completely dismantled

Dimensions

Maximum Diameter	395mm
Space Required	410mm
Minimum Height	47mm
Maximum Height	165mm
Total Stroke	118mm
Static Height	105mm
Effective Area at Static Height	750cm ²
Bellows Weight	6.9kg

